

Optical Backplane Demonstrators Using Micro-Optics and Smart Pixel Transceiver Arrays

by

David V. Plant
Department of Electrical Engineering
McGill University
Montreal, Canada H3A 2A7

and

H. Scott Hinton
Department of Electrical and Computer Engineering
University of Colorado at Boulder
Boulder, CO 80309

Abstract

We have demonstrated a representative portion of an optical backplane using FET-SEED smart pixels and free-space optics to interconnect Printed Circuit Boards (PCBs) in a two board, unidirectional link configuration. 4 x 4 arrays of FET-SEED transceivers were designed, fabricated, and packaged at the PCB level. The optical interconnection was constructed using diffractive microoptics, and custom optomechanics. The system was operated in two modes, one showing high data throughput, 50 MBit/sec, and the other demonstrating large connection densities, 2222 channel/cm².

Introduction

Future digital systems such as ATM switching systems and massively parallel processing computer systems will have large Printed Circuit Board (PCB) to Printed Circuit Board connectivity requirements to support the large aggregate throughput demands being placed on such systems.(1) Current electronic technology may not be capable of supporting both the connection densities and the bandwidth required due to connector limitations at the PCB to backplane interface.(2) Two-dimensional, free-space optical interconnects represent a potential solution to the needs of these connection-intensive digital systems. When implemented at the PCB-to-PCB level in the form of an optical backplane, this technology is potentially capable of providing greater connectivity at higher data rates than can be supported by current or projected electronic backplanes. (3)

An optical backplane can be constructed using two-dimensional arrays of passive, free-space, parallel optical communication channels which optically interconnect PCBs via smart pixels arrays. The smart pixel optoelectronics are two dimensional device arrays capable of electrical-to-optical (E/O) and optical-to-electrical (O/E) conversion of digital data. In addition to the E/O and O/E conversion, these devices can perform processing operations at the backplane level such as address recognition, or packet routing. By interconnecting PCBs with 10,000 channels/board (10 smart pixel arrays per PCB at 1000 communication channels per smart pixel array), each channel running at 100 Mbits/second will support greater than a TeraBit/sec of aggregate data traffic.

The identification of critical research issues in optical backplanes is being pursued in the form of system demonstrator experiments. ⁽⁴⁾ This paper describes a system demonstrator based on FET-SEED smart pixels, PCB level optoelectronic packaging, diffractive microoptics, and baseplate optomechanics which demonstrates a simple unidirectional PCB-to-PCB optical interconnection. The paper describes initial operational testing and characterization of the system, and is organized as follows. The FET-SEED smart pixel arrays are presented, followed by a description of the optics and optomechanics used to establish the interconnect. The system performance is described in the two modes of operation, followed by concluding remarks.

FET-SEED Smart Pixel Arrays

4x4 arrays of individually addressable FET-SEED transmitters and receivers were fabricated using the batch fabrication process made available through the ARPA COOP and AT&T.⁽⁵⁾ The FET-SEED technology monolithically integrates GaAs based field-effect transistors with normal-incidence multiple-quantum-well (MQW) modulators and detectors to form a smart pixel.⁽⁶⁾ In both arrays the optical windows were 25 x 25 μm , separated by 50 μm , and pitched at 200 μm . Figures 1a and 1b show schematics of the individual transmitter and receiver circuits respectively.

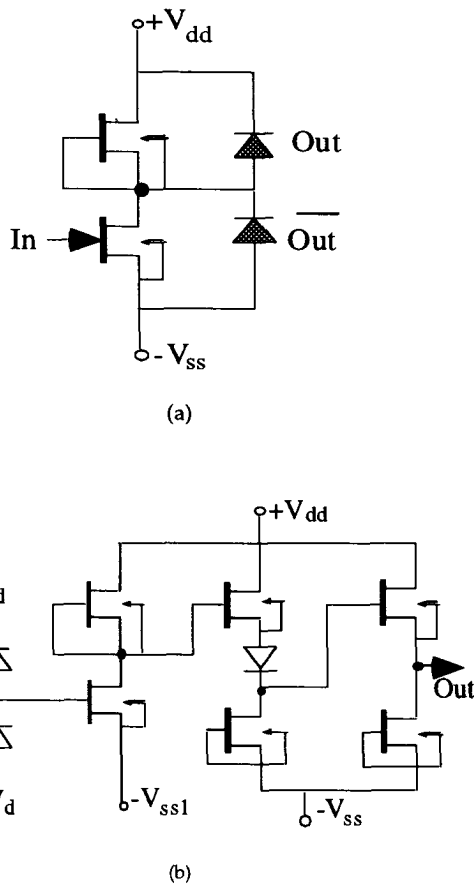


Figure 1: (a) Transmitter circuit, (b) Receiver circuit.

Both circuits are designed to work in a differential mode. In Figure 1a, the transmitter circuit operates by electrically modulating the voltage drop across the series MQW diode pair, subsequently modulating the reflectivity of the diodes.⁽⁷⁾ The electrical input impedance was designed for 50 ohms to ensure efficient coupling of high frequency, electrical digital data onto

the chip, thus ensuring high frequency differential optical operation. The receiver circuit shown in Figure 1b operates by demodulating dual rail optical signals which are detected using a series connected detector-diode pair to form a diode-clamped receiver.⁽⁸⁾ The input node to the first FET is charged and discharged as a function of the state of the incident optical power. The demodulated optical signal drives a 3-stage amplifier circuit. The first two stages form an inverting transimpedance amplifier section and the third stage is the power FET (375 μm wide gates) designed to drive 100 Ohm transmission lines off chip.

The device arrays were packaged in Quad Flat Packs (QFPs) capable of supporting forty, 3 GHz bandwidth signals. The QFPs were subsequently packaged onto the PCBs via solderless, impedance tunable connections. This tunable connection allowed for impedance matching of the device output impedance to the PCB transmission line impedance. Measurements of the rising edges of the PCB level packaged smart pixel transmitter and receiver circuits yielded 0.811 nsec and 2.57 nsec respectively.⁽⁹⁾ A description of the modeling, packaging, and characterization of the FET-SEED transceiver circuits will be the subject of a subsequent paper.

Optics and Optomechanics

Board-to-Board optical interconnection was achieved using a two-sided PCB approach. The optics and optomechanics used in the demonstration established optical communication channels using diffractive optics, bulk optics, microlens arrays, and a fiber delivery system for the optical power supply. Microoptic lens arrays, were used to implement the board-to-board relay so as to produce a system that is scalable and to obtain a board spacing that is comparable to current electronic systems. Figure 2a shows a schematic of the optical system, and Figure 2b shows a photograph of the demonstrator. The optical power was delivered from a 850 nm single frequency, unidirectional Argon ion pumped Ti:Sapphire laser coupled into single mode, polarization maintaining fiber and collimated with a 10 mm focal length lens at the fiber output tip. The system spot array generator consisted of a binary phase grating and a 40.34 mm achromat lens to produce the required 32 spot pattern at the power plane. The efficiency of the binary phase grating was measured to be 67%. Fine

adjustment of the beam positioning was accomplished using Risley beam steerers packaged with ball

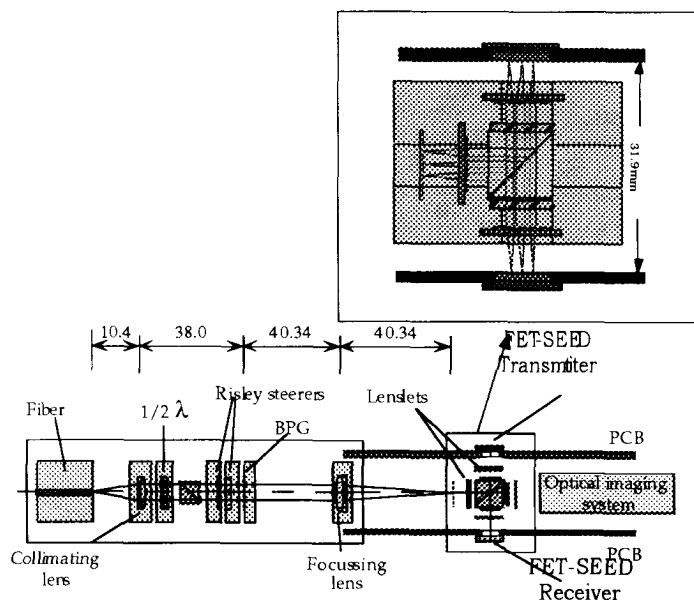


Figure 2a: Optical system layout.

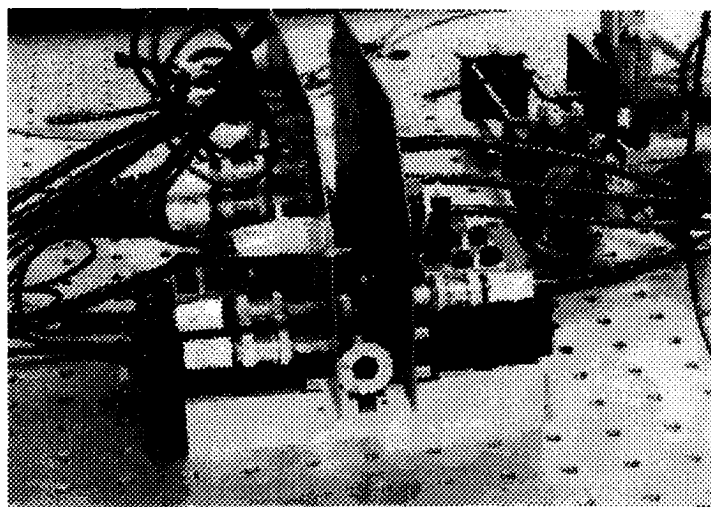


Figure 2b: Photograph of optical backplane demonstrator system.


bearings for ease of rotation. Using three 6.5mm focal length, 8 level diffractive microlens, and a 5 mm polarizing beam splitter, two 4F relays, as shown in the Figure 2a insert, were established. ⁽¹⁰⁾ The first relay was setup between the power plane and the transmitter array with microlenses one and two, and the second relay with

microlenses two and three. The microlenses had a measured throughput efficiency of 90%. The total optical losses of the system were estimated to be 20.7% from the fiber output to the transmitter array, and 70.5% from the transmitter array to the receiver array. The system was typically operated with 0.5 mW watts/window (1.0 mW watt per channel) on the transmitter array, and an average of 0.35 watts/window on the receiver array.

The optomechanical system was constructed using a slotted magnesium baseplate and pre-aligned optical components mounted into one inch holders. The components were held in place by a stacked magnet/steel bar combination which allowed for tailoring the strength of the retaining force. The PCBs were mounted onto five axis positioning stages secured to the baseplate. The optical system was designed and operated with 10 micron mechanical tolerancing. The system demonstrated excellent long term stability, and remained aligned over several days.


System Performance

The system was operated in two configurations. ⁽¹¹⁾ Based on the 600 μm center-to-center spacing of the lenslets arrays, in the first configuration the 4 corners of the transmitter/receiver smart pixel arrays were interconnected optically. Figure 3 shows the results of transmitting data from board to board over one of these micro-optical channels. In this configuration, each lenslet supported one dual rail optical channel. The system was operated in this configuration at data rates up to 75 MBit/sec on an individual channel. Based on the received optical power, and the bias voltages of the diode clamped receiver circuit, the switching energy was calculated to be 50 femtojoule/bit. To our knowledge, this is the first time a single lenslet based optical interconnect has been used to support differential optical signals. Multiple channel operation was also investigated, however the data rates were somewhat slower owing to cross talk on the FET-SEED circuit electronics. The cross talk appeared in the form of electrical pick-up on adjacent trace lines most likely due to non-optimum circuit metalization. We detected no significant optical crosstalk in the system.

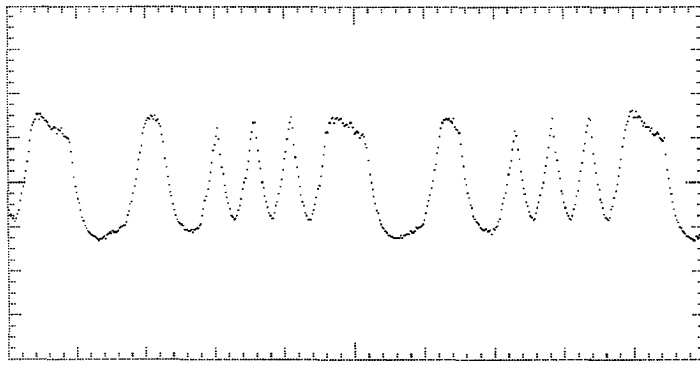

75 nsec/div

(a)

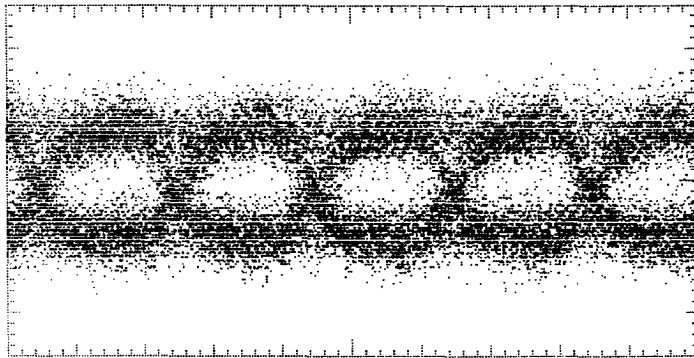


10 nsec/div

(b)

Figure 3: a) 16 Bit patterns and b) PRBS ($2^{23} - 1$) at 50MBit/sec.

In the second configuration, a single lenslet (600 μm in diameter) was used to support four dual rail optical channels, a total of eight optical channels, in a ClusterPixel configuration. This was possible due to the robustness of the lenslet design. In this optical configuration, we used 2 X 2 transceiver subarrays. In particular, we interconnected a 2 x 2 modulator array (center-to-center spacing 200 μm) in the center of the 16 element array with the center 2 x 2 sub-array on the receiver chip. Figure 4 shows a typical recording of the output of the system with all four channels being driven simultaneously at 25 MBits/sec. This result is significant in that it demonstrates an effective channel density of 2222 channels/ cm^2 , and points toward the scalability of free space interconnects at the backplane level of the interconnection hierarchy.

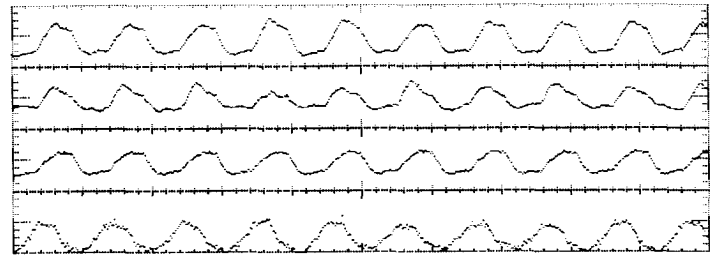

75 nsec/div

Figure 4: Super Pixel output at 25 MBits/sec.

Conclusions

In conclusion, we have constructed an optical backplane demonstrator system capable of PCB-to-PCB optical interconnection. Digital data, fed onto a PCB, was optically encoded, transmitted, demodulated, and read out electrically. FET-SEED smart pixel transceiver arrays were used for the E/O and O/E conversion. Free-space optical communication channels were established using binary diffractive gratings, multilevel diffractive microlenses, polarizing optics, all integrated onto a slotted baseplate. Operational testing of the system in two modes was performed at data rates of 150 MBits/sec for individual channels, and 75 MBit/s sec for multiple channels. Finally, a single lenslet based interconnect was used to support four differential, eight total, optical channels, each operating at 25 MBit/sec. This result points to the scalability of backplane level, free space optical interconnects for future, large switching and computing systems. Future demonstrators will expand on these results by implementing sophisticated architectures such as the Hyperplane which utilizes the increased connectivity provided by an optical backplane.⁽¹²⁾

Acknowledgments

This work was supported by the BNR-NT/NSERC Chair in Photonics Systems and the Canadian Institute for Telecommunications Research. In addition, DVP acknowledges support from NSERC (#OPG0155159), FCAR (#NC-1415), and the McGill University Graduate Faculty. The authors also gratefully acknowledge M.R. Taghizadeh of Heriot-Watt University for providing the diffractive lenslet arrays.

References

- 1) H.S. Hinton, Canadian Institute for Telecommunications Research, "Photonic Devices and Systems Major Project", Annual Report, 1994.
- 2) R. Lord and S. Aujla, "High Density Backplane Connector", *Interconnection Technology*, vol. 10, pp. 8-11, 1994.
- 3) D. A. B. Miller, "Optics for low-energy communication inside digital processors: quantum detectors, sources, and modulators as efficient impedance converters," *Optics Letters*, Vol. 14, No. 2, pp. 146 - 148, 1989.
- 4) F.B. McCormick, T.J. Cloonan, A.L. Lentine, J.M. Sasian, R.L. Morrison, M.G. Beckman, S.L. Walker, M.J. Wojcik, S.J. Hinterlong, R.J. Crisci, R.A. Novotny, and H.S. Hinton, "Five-stage Free-space Optical Switching Network With Field-Effect Transistor Self-Electro-Optic-Effect-Device Smart-Pixel Arrays", *Appl. Opt.*, Vol. 33, No. 8, pp. 1601 - 1618, 1994.
- 5) Consortium for Optical and Optoelectronic Technologies for Computing (CO-OP) & AT&T, FET-SEED Design Workshop, June 21 - 24, Newark, NJ, 1993.
- 6) L.A. D'Asaro, L.M.F. Chirovsky, E.J. Laskowski, S.S. Pei, T.K. Woodward, L.L. Lentine, R.E. Leibenguth, M.W. Focht, J.M. Freund, G.G. Guth and L.E. Smith, "Batch Fabrication and Operation of GaAs-Al_xGa_{1-x}As Field-Effect Transistor-Self-Electrooptic Effect Device (FET-SEED) Smart Pixel Arrays", *IEEE J. Quantum Electron.*, Vol. 29, No. 2, pp. 670 - 677, 1993.
- 7) A.L. Lentine, L.M.F. Chirovsky, L.A. D'Asaro, E.J. Laskowski, S.S. Pei, M.W. Focht, J.M. Freund, G.D. Guth, R.E. Leibenguth, L.E. Smith, and T.K. Woodward, "Field-Effect-Transistor Self-Electro-Optic-Effect-Device (FET-SEED) Electrically Addressed Differential Modulator Array", *Appl. Opt.*, Vol. 33, No. 14, pp. 2849 - 2855, 1994.
- 8) T.K. Woodward, A.L. Lentine and L.M.F. Chirovsky, "Experimental Sensitivity Studies of Diode-Clamped FET-SEED Smart-Pixel Optical Receivers", *IEEE J. Quantum Electron.*, Vol. 30, No. 10, pp. 2319 - 2324, 1994.
- 9) D.V. Plant, A.Z. Shang, M.R. Otazo, B. Robertson and H.S. Hinton, "Design and Characterization of FET-SEED Smart Pixel Transceiver Arrays for Optical Backplanes", *Technical Digest, IEEE/LEOS Topical Meeting on Smart Pixels*, pp. 26 - 27, 1994. A.Z. Shang, D.V. Plant and H.S. Hinton, "FET-SEED Smart Pixel Layout Extraction and Simulation", *Technical Digest, IEEE/LEOS Topical Meeting on Smart Pixels*, pp. 72 - 73, 1994.
- 10) B. Robertson, G.C. Boisset, H.S. Hinton, Y.S. Liu, N.H. Kim, M.R. Otazo, D. Pavlasek, D.V. Plant, D. Rolston, "Design of a Lenslet Array Based Free-Space Optical Backplane Demonstrator", *Proceedings of the Optical Computing 1994 Conference*, in press.
- 11) D.V. Plant, B. Robertson, H.S. Hinton, W.M. Robertson, G.C. Boisset, N.H. Him, Y.S. Liu, M.R. Otazo, D.R. Rolston, A.Z. Shang and L. Sun, "A FET-SEED Smart Pixel Based Optical Backplane Demonstrator", *Proceedings of the Optical Computing 1994 Conference*, in press.
- 12) T. Szymanski and H.S. Hinton, "Architecture of a Terabit Free-Space Photonic Backplane", *Proceedings of the Optical Computing 1994 Conference*, in press.